
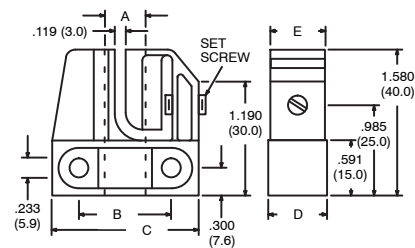


# PRX9212, PRX9218

## Microswitch Adapters

NTE Type No.	Description	Fig. No.
PRX9212	12mm Adapter, Series 1200 Switches	PA6
PRX9218	18mm Adapter, Series 1800 Switches	PA6

NTE Type No.	A In.	B In.	C In.	D In.	E In.
PRX9212	.473 (12.0)	.985 (25.0)	1.580 (40.0)	.630 (16.0)	.591 (15.0)
PRX9218	.717 (18.2)	1.190 (30.0)	1.780 (45.0)	.867 (22.0)	.867 (22.0)

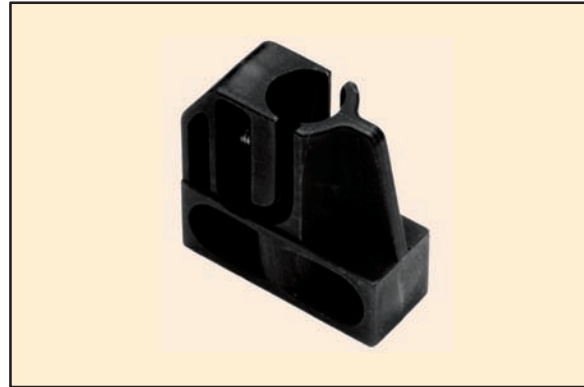

# PRX9900

## Proximity Switch Tester

### Features

- Tests All Types
  - ✓ Inductive
  - ✓ Capacitive
  - ✓ Photoelectric
  - ✓ AC - 2 and 3 Wire
    - Normally Open
    - Normally Closed
  - ✓ DC - 2, 3 and 4 Wire
    - NPN
    - PNP
    - Normally Open
    - Normally Closed
    - Complementary
    - NAMUR
- No Need To Remove Switch To Test
- Go/No Go LED Indicators
- Quick Connect Terminals
- Battery Operated

### Specifications

#### General

- LED Indicators:** Hi-Bright Red LEDs
- Terminals:** Spring Loaded, Quick Connects
- Power:** 9 Volt Alkaline or Carbon-Zinc Battery (NEDA 1604)
- Battery Life:** 15 Hrs Typ with Carbon-Zinc Cells, 30 Hrs Typ with Alkaline Cells
- Protection Rating:** NEMA 1, IP 21 (General Purpose)
- Dimensions:** 4.75" (120mm) x 2.56" (65mm) x 1.56" (40mm)
- Tests Switch Types**
  - AC Switches:** 2 or 3 Wire, Normally Open or Closed
  - DC Switches:** 2, 3 or 4 Wire, Normally Open or Closed, NPN, PNP, NAMUR

