


Cold Weather Cable Ties



Features

- Specially formulated material to withstand long periods of exposure to sub-zero temperatures before installation
- Prevent downtime replacing ties from cracking or breaking from extreme cold temperatures
- Increased flexibility and toughness
- Impact resistant and UV weatherable
- UL approved for installation performance at $-20^{\circ}\text{C} / -4^{\circ}\text{F}$ and application temperatures $-40^{\circ}\text{C} / -40^{\circ}\text{F}$

WT-01

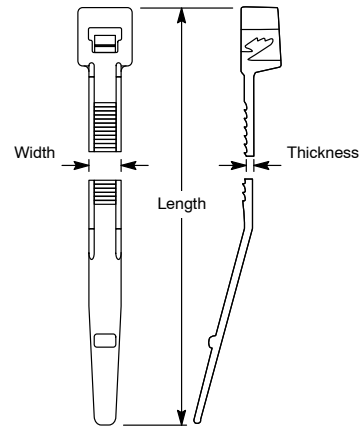

Cable Ties available in UV Black Nylon 12 only.

NTE Type No.	Length	Width	Thickness	Max. Bundle Dia.	Tensile Strength	Qty. per Bag	Diag No.
04-CW07-50	7.56 / 192.0	.18 / 4.57	.05 / 1.32	1.87 / 47.62	50 lb./222 n.	100	WT-01
04-CW11-50	11.25 / 285.7	.18 / 4.57	.05 / 1.32	3.06 / 77.77	50 lb./222 n.	100	WT-01
04-CW14-50	14.5 / 368.3	.18 / 4.57	.05 / 1.32	4.0 / 101.6	50 lb./222 n.	100	WT-01
04-CW14-120	15.09 / 383.3	.30 / 7.62	.07 / 1.93	4.06 / 103.12	120 lb./534 n.	100	WT-01


Solar Cable Ties



Features

- Molecularly designed for solar applications to withstand the harsh rays of the sun and corrosive outdoor elements
- Low water absorption and density maintains stability
- Ideal for galvanized steel surface contact
- Chemical resistant and insensitive to stress cracking
- Smooth edges eliminates abrasion damage

WT-01

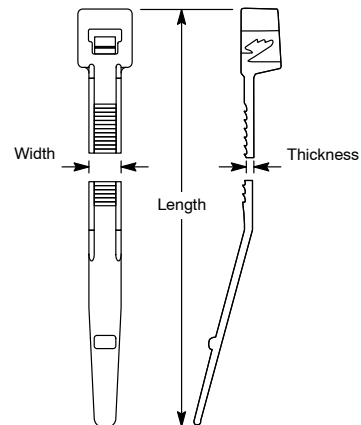

Cable Ties available in UV Black Nylon 12 only.

NTE Type No.	Length	Width	Thickness	Max. Bundle Dia.	Tensile Strength	Qty. per Bag	Diag No.
04-ST05-40	5.84 / 148.33	.140 / 3.556	.049 / 1.244	1.437 / 36.4	40 lb./178 n.	100	WT-01
04-ST07-50	7.56 / 192.07	.180 / 4.572	.052 / 1.320	1.875 / 47.6	50 lb./222 n.	100	WT-01
04-ST11-50	11.25 / 285.75	.180 / 4.572	.052 / 1.320	3.062 / 77.7	50 lb./222 n.	100	WT-01
04-ST14-50	14.50 / 368.30	.180 / 4.572	.052 / 1.320	4.00 / 101.6	50 lb./222 n.	100	WT-01
04-ST08-120	8.70 / 220.98	.300 / 7.620	.076 / 1.930	2.06 / 52.3	120 lb./534 n.	100	WT-01
04-ST14-120	15.09 / 383.36	.300 / 7.620	.076 / 1.930	4.06 / 103.1	120 lb./534 n.	100	WT-01