



ELECTRONICS, INC.
44 FARRAND STREET
BLOOMFIELD, NJ 07003
(973) 748-5089
<http://www.nteinc.com>

NTE2588
Silicon NPN Transistor
Horizontal Output for HDTV
TO-220 Full Pack

Features:


- High Breakdown Voltage: $V_{(BR)CEO} = 1200V$ Min

Absolute Maximum Ratings: ($T_A = +25^\circ\text{C}$ unless otherwise specified)

Collector–Base Voltage, V_{CBO}	1500V
Collector–Emitter Voltage, V_{CEO}	1200V
Emitter–Base Voltage, V_{EBO}	5V
Collector Current, I_C	
Continuous	30mA
Peak	100mA
Collector Power Dissipation, P_C	2W
Operating Junction Temperature, T_J	+150°C
Storage Temperature Range, T_{stg}	-55° to +150°C
Maximum Thermal Resistance, Junction-to-Case, R_{thJC}	8.3°C/W

Electrical Characteristics: ($T_C = +25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector Cutoff Current	I_{CBO}	$V_{CB} = 1200V$, $I_E = 0$	–	–	1	μA
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 4V$, $I_C = 0$	–	–	1	μA
DC Current Gain	h_{FE}	$V_{CE} = 5V$, $I_C = 1.5A$	10	–	60	
Gain Bandwidth Product	f_T	$V_{CE} = 10V$, $I_C = 1.5A$	–	6	–	MHz
Collector–Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 3mA$, $I_B = 0.6mA$	–	–	5	V
Base–Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 3mA$, $I_B = 0.6mA$	–	–	2	V
Collector–Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = 100\mu\text{A}$, $I_E = 0$	1500	–	–	V
Collector–Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 1mA$, $R_{BE} = \infty$	1200	–	–	V
Emitter–Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = 100\mu\text{A}$, $I_C = 0$	5	–	–	V
Output Capacitance	C_{ob}	$V_{CB} = 100V$, $f = 1\text{MHz}$	–	2.0	–	pF

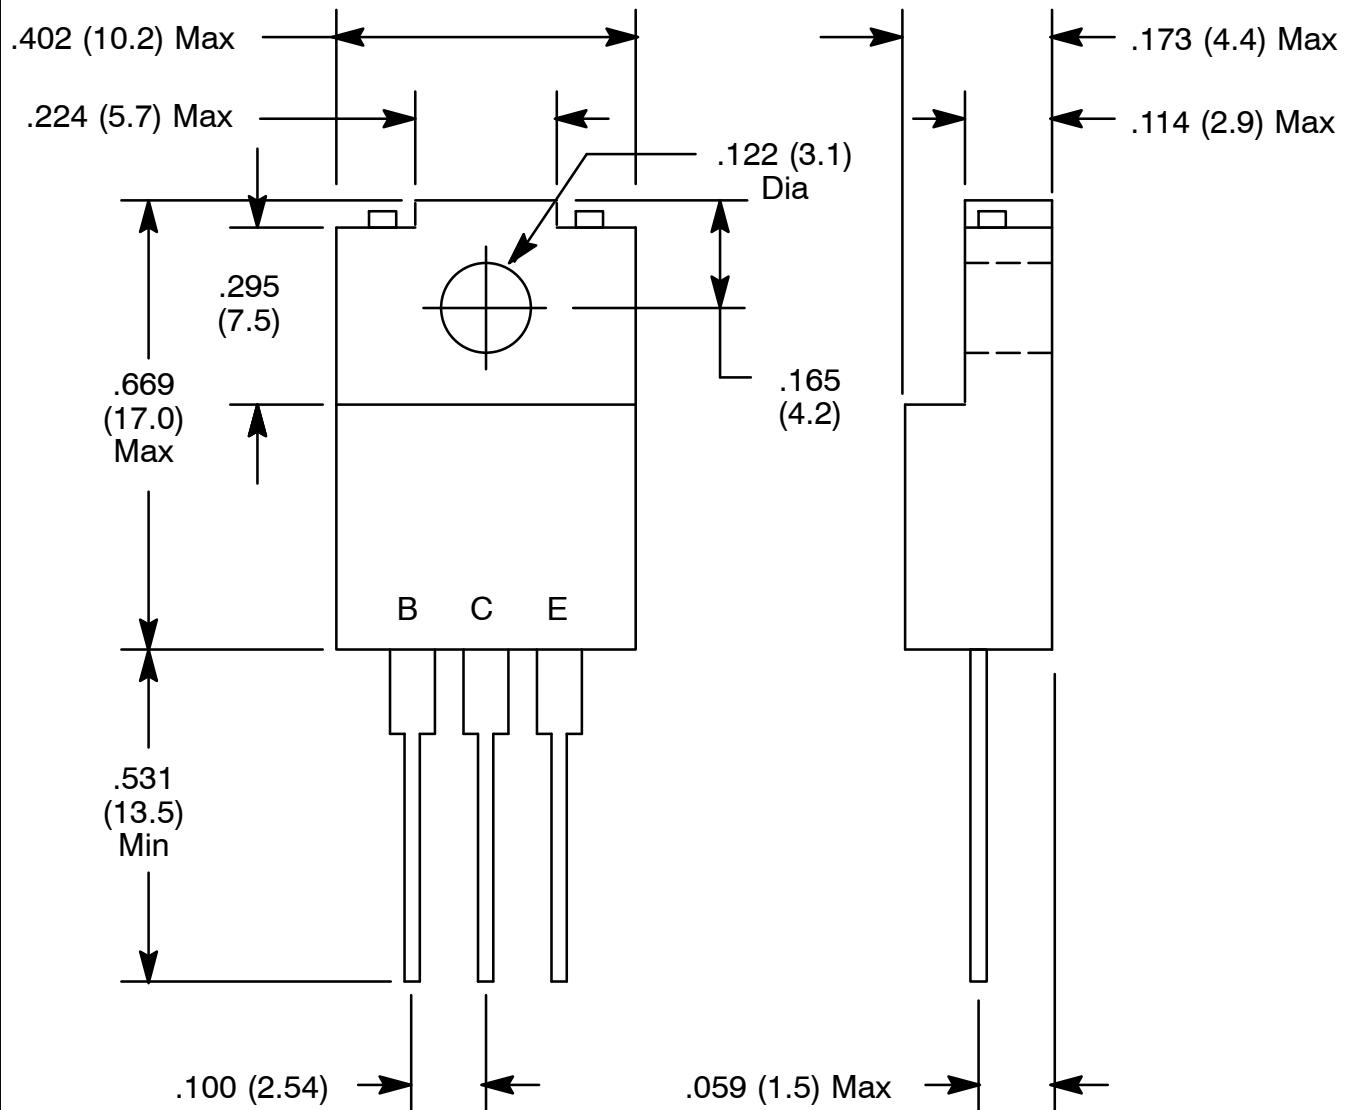

NOTE: Tab is isolated