



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089
<http://www.nteinc.com>

NTE894M & NTE894SM Integrated Circuit Low Noise Operational Amplifier

Description:

The NTE894M and NTE894SM are single, high-performance, low noise operational amplifiers. Compared to other operational amplifier, these devices show better noise performance, improved output drive capability and considerably higher small-signal and power bandwidths.

This makes the devices especially suitable for applications in high quality and professional audio equipment, in instrumentation and control circuits and telephone channel amplifiers. The OP amps are internally compensated for gain equal to, or higher than, three.

Features:

- Small-Signal Bandwidth
- Large Supply Voltage Range
- Available in 8-Lead Mini DIP (NTE894M) and Surface Mount SOIC-8 (NTE894SM)

Applications:

- Audio Equipment
- Instrumentation and Control Circuits
- Telephone Channel Amplifiers
- Medical Equipment

Absolute Maximum Ratings:

| | |
|--|-------------------------------|
| Supply Voltage, V_S | $\pm 22V$ |
| Differential Input Voltage (Note 1), V_{DIFF} | $\pm 0.5V$ |
| Input Voltage, V_{IN} | $\pm V$ supply V |
| Power Dissipation ($T_A = +25^\circ C$, Note 2), P_D | 1150mW |
| Output Short-Circuit Duration (Note 3) | Indefinite |
| Operating Temperature Range, T_{opr} | 0° to $+70^\circ C$ |
| Storage Temperature Range, T_{stg} | -65° to $+150^\circ C$ |
| Lead Soldering Temperature (10 seconds), T_L | $+300^\circ C$ |

Note 1. Diodes protect the inputs against over voltage. Therefore, unless current limiting resistors are used, large currents will flow if the differential input voltage exceeds 0.6V. maximum current should be limited to $\pm 10mA$.

Note 2. For operation at elevated temperature, derate packages based on the following junction-to-ambient thermal resistance: NTE894M $105^\circ C/W$; NTE894SM $160^\circ C/W$.

Note 3. Output may be shorted to GND at $V_S = 15V$, $T_A = +25^\circ C$. Temperature and/or supply voltages must be limited to ensure dissipation rating is not exceeded.

DC Electrical Characteristics: ($T_A = +25^\circ\text{C}$, $V_S = \pm 15\text{V}$, unless otherwise specified)

| Parameter | Symbol | Test Conditions | Min | Typ | Max | Unit | |
|------------------------------|--------------------------|---|--|----------|------------|------------------------------|---|
| Input Offset Voltage | V_{OS} | | - | 0.5 | 4 | mV | |
| | | $T_A = 0^\circ$ to $+70^\circ\text{C}$ | - | - | 5 | mV | |
| | $\Delta V_{OS}/\Delta T$ | | - | 5 | - | $\mu\text{V}/^\circ\text{C}$ | |
| Input Offset Current | I_{OS} | | - | 20 | 300 | nA | |
| | | $T_A = 0^\circ$ to $+70^\circ\text{C}$ | - | - | 400 | nA | |
| | $\Delta I_{OS}/\Delta T$ | | - | 200 | - | $\text{pA}/^\circ\text{C}$ | |
| Input Bias Current | I_B | | - | 500 | 1500 | nA | |
| | | $T_A = 0^\circ$ to $+70^\circ\text{C}$ | - | - | 2000 | nA | |
| | $\Delta I_B/\Delta T$ | | - | 5 | - | $\text{nA}/^\circ\text{C}$ | |
| Supply Current | I_{CC} | | - | 4 | 8 | mA | |
| | | $T_A = 0^\circ$ to $+70^\circ\text{C}$ | - | - | 10 | mA | |
| Input Common-Mode Range | V_{CM} | | ± 12 | ± 13 | - | V | |
| Common-Mode Rejection Ratio | CMRR | | 70 | 100 | - | dB | |
| Power Supply Rejection Ratio | PSRR | | - | 10 | 100 | $\mu\text{V}/\text{V}$ | |
| Large-Signal Voltage Gain | A_{VOL} | $R_L \geq 600\Omega$, $V_O = \pm 10\text{V}$ | 25 | 100 | - | V/mV | |
| | | $T_A = 0^\circ$ to $+70^\circ\text{C}$ | 15 | - | - | V/mV | |
| Output Voltage Swing | V_{OUT} | $R_L \geq 600\Omega$ | | ± 12 | ± 13 | - | V |
| | | | $T_A = 0^\circ$ to $+70^\circ\text{C}$ | ± 10 | ± 12 | - | V |
| | | $R_L \geq 600\Omega$, $V_O = \pm 18\text{V}$ | | ± 15 | ± 16 | - | V |
| | | $R_L \geq 2\text{k}\Omega$ | | ± 13 | ± 13.5 | - | V |
| | | | $T_A = 0^\circ$ to $+70^\circ\text{C}$ | ± 12 | ± 12.5 | - | V |
| Input Resistance | R_{IN} | | 50 | 100 | - | $\text{k}\Omega$ | |
| Output Short-Circuit Current | I_{SC} | | - | 38 | - | mA | |


AC Electrical Characteristics: ($T_A = +25^\circ\text{C}$, $V_S = \pm 15\text{V}$ unless otherwise specified)

| Parameter | Symbol | Test Conditions | Min | Typ | Max | Unit |
|------------------------|-----------|---|-----|-----|-----|------------------------|
| Output Resistance | R_{OUT} | $A_V = 30\text{dB}$, Closed-Loop, $f = 10\text{kHz}$, $R_L = 600\Omega$, $C_C = 22\text{pF}$ | - | 0.3 | - | Ω |
| Transient Response | | Voltage Follower, $V_{IN} = 50\text{mV}$, $R_L = 600\Omega$, $C_C = 22\text{pF}$, $C_L = 100\text{pF}$ | | | | |
| Rise Time | t_R | | - | 20 | - | ns |
| Overshoot | | | - | 20 | - | % |
| Transient Response | | $V_{IN} = 50\text{mV}$, $R_L = 600\Omega$, $C_C = 47\text{pF}$, $C_L = 500\text{pF}$ | | | | |
| Rise Time | t_R | | - | 50 | - | ns |
| Overshoot | | | - | 35 | - | % |
| Gain | A_V | $f = 10\text{kHz}$, $C_C = 0$ | - | 6 | - | V/mV |
| | | $f = 10\text{kHz}$, $C_C = 22\text{pF}$ | - | 2.2 | - | V/mV |
| Gain Bandwidth Product | GBW | $C_C = 22\text{pF}$, $C_L = 100\text{pF}$ | - | 10 | - | MHz |
| Slew Rate | SR | $C_C = 0$ | - | 13 | - | $\text{V}/\mu\text{s}$ |
| | | $C_C = 22\text{pF}$ | - | 6 | - | $\text{V}/\mu\text{s}$ |
| Power Bandwidth | | $V_{OUT} = \pm 10\text{V}$, $C_C = 0$ | - | 200 | - | kHz |
| | | $V_{OUT} = \pm 10\text{V}$, $C_C = 22\text{pF}$ | - | 95 | - | kHz |
| | | $V_{OUT} = \pm 14\text{V}$, $R_L = 600\Omega$, $C_C = 22\text{pF}$, $V_{CC} = \pm 18\text{V}$ | - | 70 | - | kHz |


Electrical Characteristics: ($T_A = +25^\circ\text{C}$, $V_S = 15\text{V}$ unless otherwise specified)

| Parameter | Symbol | Test Conditions | Min | Typ | Max | Unit |
|------------------------|--------------------|--|-----|-----|-----|------------------------------|
| Input Noise Voltage | V_{NOISE} | $f_O = 30\text{Hz}$ | - | 5.5 | 7.0 | $\text{nV}/\sqrt{\text{Hz}}$ |
| | | $f_O = 1\text{kHz}$ | - | 3.5 | 4.5 | $\text{nV}/\sqrt{\text{Hz}}$ |
| Input Noise Current | I_{NOISE} | $f_O = 30\text{Hz}$ | - | 1.5 | - | $\text{pA}/\sqrt{\text{Hz}}$ |
| | | $f_O = 1\text{kHz}$ | - | 0.4 | - | $\text{pA}/\sqrt{\text{Hz}}$ |
| Broadband Noise Figure | | $f = 10\text{Hz to } 20\text{kHz}$, $R_S = 5\text{k}\Omega$ | - | 0.9 | - | dB |
| Channel Separation | | $f = 1\text{kHz}$, $R_S = 5\text{k}\Omega$ | - | 110 | - | dB |


Pin Connection Diagram

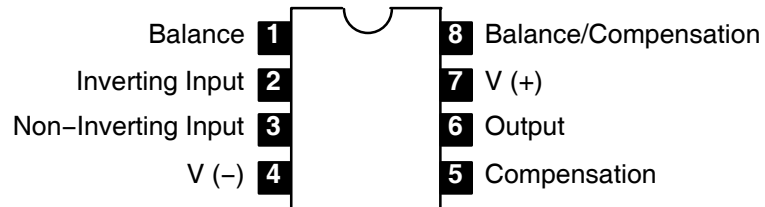

NTE894M

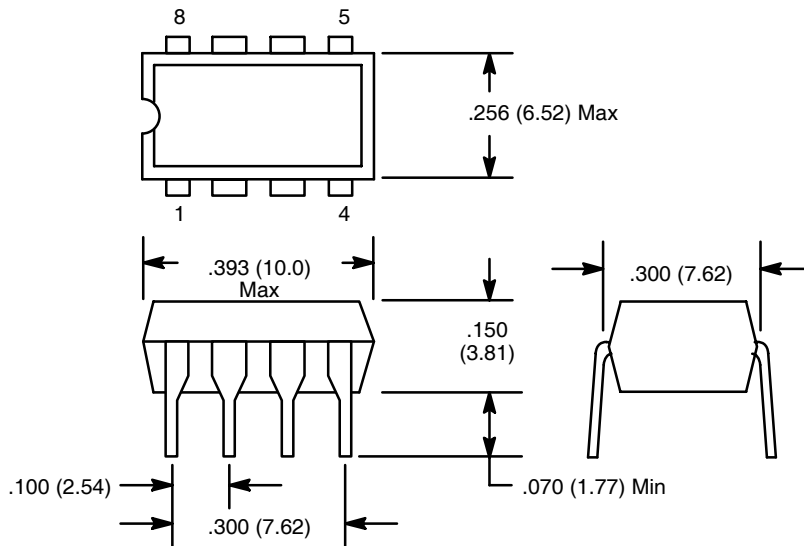

NTE894SM

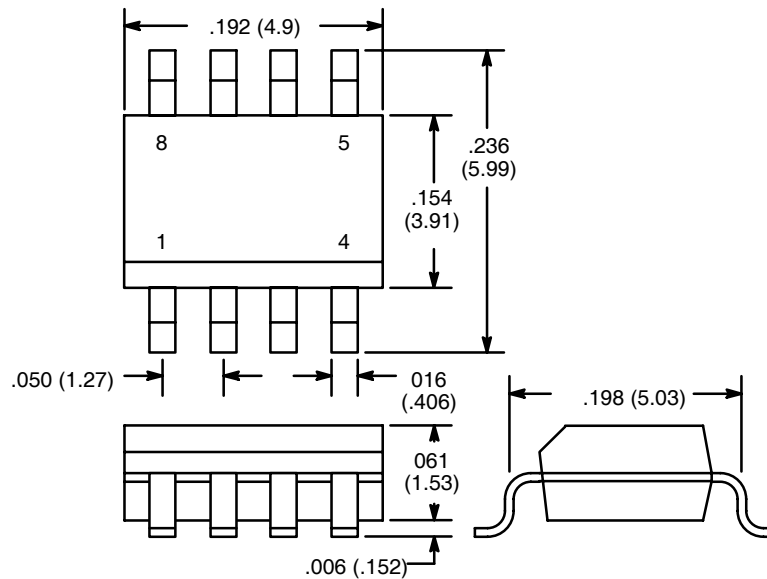

NOTE: Pin1 on Beveled Edge