

Power Bank

Features

- Includes Micro USB Cable
- Charges Most Mobile Phones, iPad, PSP, MP3/MP4 Players, PDAs, etc.
- Micro USB Input Port, Standard USB Output Interface

Specifications

Input

Rated Voltage: 5VDC

Working Voltage Range: 4.5V to 5.5VDC

Current: 1 Amp

Built-In Battery: 2600mAh

Charging Voltage: 4.3V ± 0.05V

Charging Current: 400 to 600mA

Life Cycle: ≤ 500 charges under normal usage

Output

Un-Loaded Voltage: 4.8V to 5.25VDC

Loaded Voltage: 4.8V to 5.25VDC (Output Port Measurement)

Rated Current: 1 Amp

Conversion Efficiency: ≥ 80%

Work Environment

Working Temperature: 0° to +40°C

Storage Temperature: -20° to +40°C

Relative Temperature: ≤ 90%

Atmospheric Pressure: 85 to 106Kpa

Ordering Information

NTE Type No.	Plug Type
NEW 57-PB1	Micro USB Input / Standard USB Output



Polarity Reversal Plug




Features

- Single 5' Cable Contains Jack on One End and Plug on the Other
- Can be Used to Reverse Polarity on Either Positive or Negative Center Pin Adapters



Plug Types

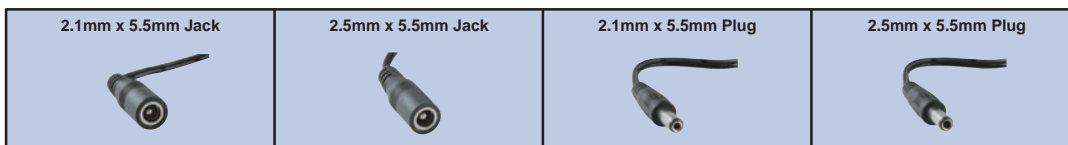

Ordering Information

NTE Type No.	Plug Type
NEW 57-PRP1	2.1mm x 5.5mm Jack and Plug
NEW 57-PRP2	2.5mm x 5.5mm Jack and Plug