


Expandable Braided Polyester Sleeving

Features

- Allows Flexibility while Providing Secure Bundling
- Easy to Install, Lightweight and Flexible
- Bundles Cables and Organizes Wires for a Professional Look
- 16.4 foot (5 meter) Lengths
- Material: Flame Retardant Polyethylene Terephthalate (PET)
- Working Temperature Range: -50° to +150°C (-58° to +302°F)
- Flammability: Self-Extinguishing, met UL1441 VW-1
- Melting Point: +250°C ±5° (+482°F ±5°)
- Specific Gravity @ +73°F (+23°C): 1.39
- Tensile Strength @ +73°F (+23°C) PSI: 39.275
- Elongation: 30%
- Water Absorption: 0.08%

ES-01

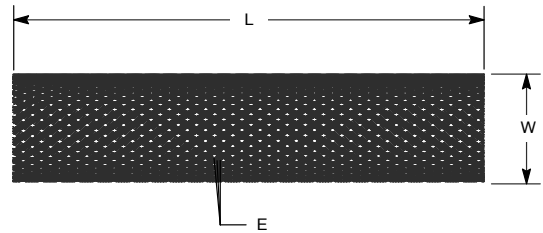

Expandable Braided Polyester Sleeving

| NTE Type No. | Size (inch) | Expandable Range, I to O (in. / mm) | Dia. of Monofilament*Strand (E) | Weight (g/100M) | Diag No. |
|--------------|-------------|-------------------------------------|---------------------------------|-----------------|----------|
| 04-ES-125 | 1/8" | .094 (2.4) - .252 (6.4) | 0.25*1 | 220 | ES-01 |
| 04-ES-250 | 1/4" | .126 (3.2) - .437 (11.1) | 0.25*3 | 575 | ES-01 |
| 04-ES-375 | 3/8" | .189 (4.8) - .626 (15.9) | 0.25*3 | 910 | ES-01 |
| 04-ES-500 | 1/2" | .252 (6.4) - .752 (19.1) | 0.25*3 | 1100 | ES-01 |
| 04-ES-750 | 3/4" | .500 (12.7) - 1.252 (31.8) | 0.25*3 | 1410 | ES-01 |
| 04-ES-1000 | 1" | .626 (15.9) - 1.500 (38.1) | 0.25*3 | 1650 | ES-01 |