


# PICO<sup>®</sup> Fuse Equivalent – 2.4 x 7mm Epoxy Coated Axial Lead




## Features

- Available in Fast Acting and Slow Blow Types
- RoHS Compliant

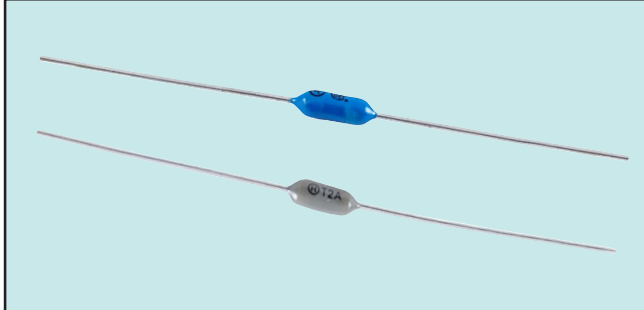

## F-09

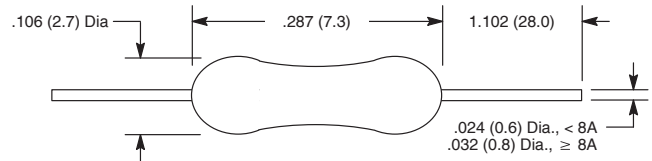

## Specifications

**Rated Voltage:** 125V

**Breaking Capacity:**

**Fast Acting:**

125V, 50A (250mA – 3A); 125V, 30A (3.5A – 10A)

**Slow Blow:**

125V, 30A (375mA – 7A)

**Time Current Characteristics:**

| % of Ampere Rating | Opening Time    |                    |
|--------------------|-----------------|--------------------|
|                    | Fast Acting     | Slow Blow          |
| 100%               | 4 hours min.    | 4 hours min.       |
| 200%               | 20 seconds max. | 60 seconds max.    |
| 300%               | –               | 0.2 – 3.0 seconds  |
| 800%               | –               | 0.02 – 0.1 seconds |

## Ordering Information:

| NTE Type No. |            | Rated Current | Diag No. |
|--------------|------------|---------------|----------|
| Fast Acting  | Slow Blow  |               |          |
| 74-MF250MA   |            | 250mA         | F-09     |
| 74-MF375MA   | 74-MS375MA | 375mA         | F-09     |
| 74-MF500MA   | 74-MS500MA | 500mA         | F-09     |
| 74-MF750MA   | 74-MS750MA | 750mA         | F-09     |
| 74-MF1A      | 74-MS1A    | 1.0A          | F-09     |
| 74-MF1.5A    | 74-MS1.5A  | 1.5A          | F-09     |
| 74-MF2A      | 74-MS2A    | 2.0A          | F-09     |
| 74-MF2.5A    | 74-MS2.5A  | 2.5A          | F-09     |
| 74-MF3A      | 74-MS3A    | 3.0A          | F-09     |
| 74-MF3.5A    | 74-MS3.5A  | 3.5A          | F-09     |
| 74-MF4A      | 74-MS4A    | 4.0A          | F-09     |
| 74-MF5A      | 74-MS5A    | 5.0A          | F-09     |
| 74-MF7A      | 74-MS7A    | 7.0A          | F-09     |
| 74-MF10A     |            | 10A           | F-09     |

**NOTE:** All fuses are CSA approved. Fast Acting fuse are UL listed up to 3A and UL recognized from 3.5A to 10A. Slow Blow fuses are UL recognized ONLY.