



ELECTRONICS, INC.
 44 FARRAND STREET
 BLOOMFIELD, NJ 07003
 (973) 748-5089
<http://www.nteinc.com>

NTE573-1 & NTE573-2 Schottky Barrier Rectifier DO-201AD Type Package

Features:

- Schottky Barrier Chip
- Guard Ring for Transient and ESD Protection
- Surge Overload Rating to 150A Peak
- Low power Loss, High Efficiency
- Ideally Suited for Use in High Frequency SMPS, Inverters, and as Free Wheeling Diodes

Maximum Ratings and Electrical Characteristics: ($T_A = +25^\circ\text{C}$ unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.)

Peak Repetitive Reverse Voltage, V_{RRM}	
NTE573-1	100V
NTE573-2	200V
Working Peak Reverse Voltage, V_{RWM}	
NTE573-1	100V
NTE573-2	200V
DC Blocking Voltage, V_R	
NTE573-1	100V
NTE573-2	200V
RMS Reverse Voltage, $V_{R(RMS)}$	
NTE573-1	70V
NTE573-2	140V
Average Forward Rectified Current (Note 1), I_O	5A
Non-Repitative Peak Forward Surge Current, I_{FSM}	
(8.3ms Single half Sine-Wave Superimposed on Rated Load)	150A
Forward Voltage ($I_F = 5A$), V_{FM}	
NTE573-1	0.85V
NTE573-2	0.9V
Peak Reverse Current (At rated DC Blocking Voltage), I_{RM}	
$T_J = +25^\circ\text{C}$	
NTE573-1	0.5mA
NTE573-2	0.2mA
$T_J = +100^\circ\text{C}$	
NTE573-1	20mA
NTE573-2	5mA
Typical Junction Capacitance (Note 2), C_J	
NTE573-1	380pF
NTE573-2	120pF




Maximum Ratings and Electrical Characteristics (Cont'd): ($T_A = +25^\circ\text{C}$ unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.)

Thermal Resistance, Junction-to-Ambient (Note 3), R_{thJA}	25°C/W
Thermal Resistance, Junction-to-Leadt (Note 3), R_{thJL}	8.0°C/W
Operating Junction Temperature Range, T_J	-65° to +150°C
Storage Temperature Range, T_{stg}	-65° to +150°C

Note 1. Leads maintained at ambient temperature at a distance of 9.5mm from the case.

Note 2. Measured at 1.0MHz and applied reverse voltage of 4.0VDC.

Note 3. Vertical PCB mounting with 12.7mm lead length on 63.5mm x 63.5mm copper pad.

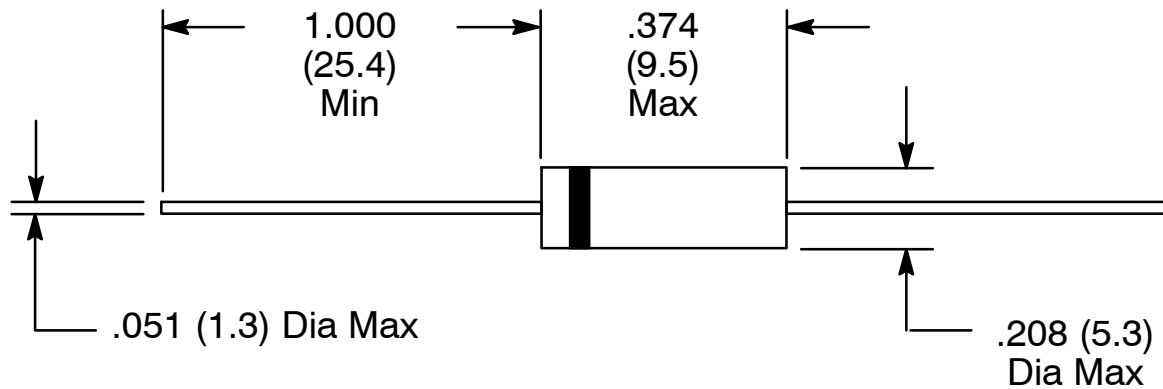

Color Band Denotes Cathode