


Snap Action Security Pushbutton, Single Pole

Features


- .748" (19mm) bushing diameter

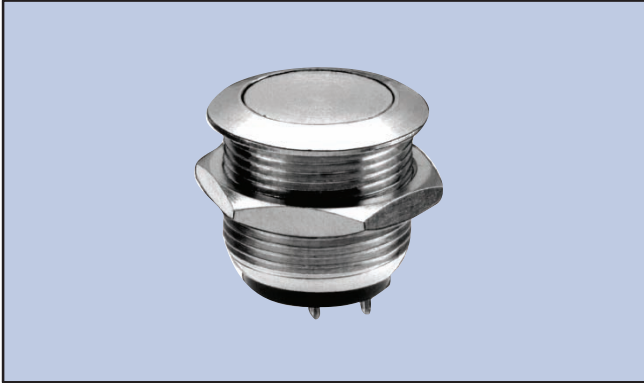

NTE Type No.	Circuitry	Action	Actuator	Diag No.
54-472	SPST-NO	OFF (ON)	Nickel Plated Brass, Curved	S85
54-473	SPST-NO	OFF (ON)	Nickel Plated Brass, Flat	S85

SPECIAL NOTE: () = Momentary Function

S85 Curved Actuator

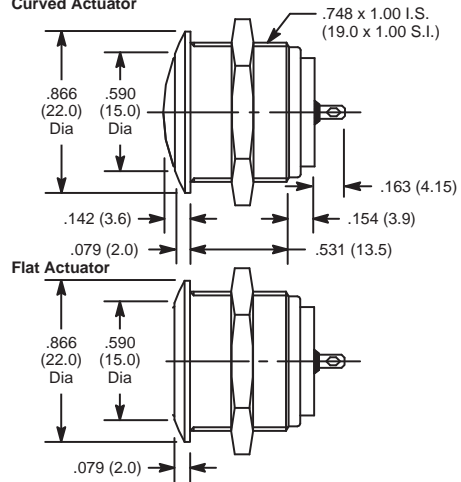

Specifications

Contact Rating: 50mA 24VDC max. (Resistive Load)
Initial Contact Resistance: 100 Milliohms (max.)
Insulation Resistance: 1000 Megohms (min.) at 500VDC
Dielectric Strength: 500V RMS (min.)
Temperature Rating: -22° to +158°F (-30° to +70°C)
Electrical Life: 1,000,000 cycles at full load
Mechanical Life: 100,000 cycles at 300mA 24V
Operating Force: 7 N ±2 N
Terminal Type: Solder lug
Mounting Hole: .756 (19.2)


Economy Anti Vandal Pushbutton, Single Pole

Features

- .748" (19mm) bushing diameter



S124

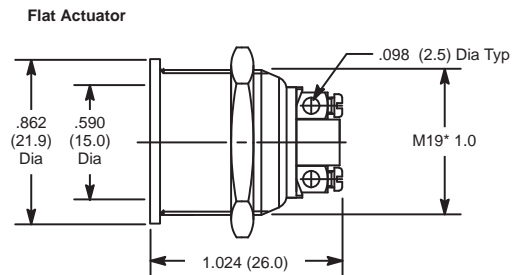

Specifications

Contact Rating: 5A 48VDC max.
Initial Contact Resistance: 50 Milliohms (max.) initial
Insulation Resistance: 100 Megohms (min.)
Dielectric Strength: 2000VAC for 1 minute
Temperature Rating: -4° to +158°F (-20° to +70°C)
Operating Life: 200,000 cycles
Terminal Type: Screw Type
Mounting Hole: .756 (19.2)

NTE Type No.	Circuitry	Action	Actuator	Diag No.
54-375E	SPST-NO	OFF (ON)	Stainless Steel, Flat	S124

NEW

SPECIAL NOTE: () = Momentary Function