



# Illuminated On/Off Bat Handle, Duckbill, Transparent, and Metal Toggle

## Features

- Bat Handle, Duckbill, Transparent, and Metal Types
- .250" Quick-Connect Terminals

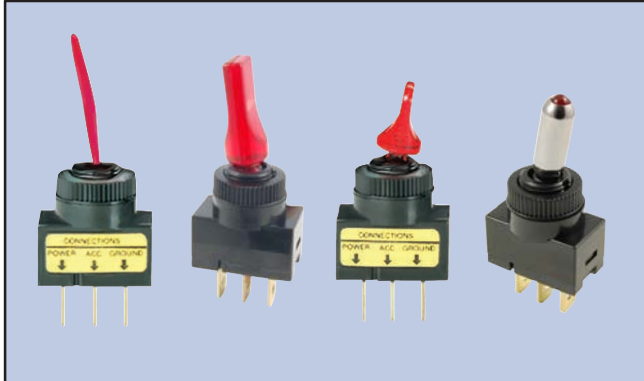

## S31

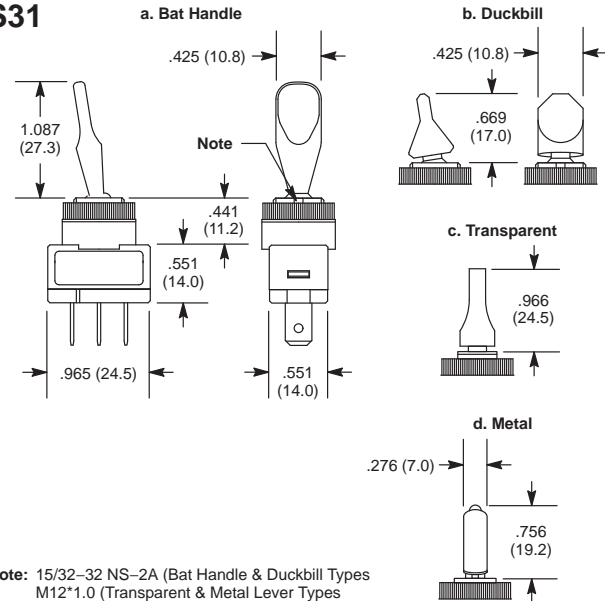

**Note:** 15/32-32 NS-2A (Bat Handle & Duckbill Types)  
 M12\*1.0 (Transparent & Metal Lever Types)

## Specifications

- Current Rating:** 20A 12VDC
- Lens Color:** See Table
- Lamp Voltage:** 12V Neon (AC) & 12V LED (DC)
- Insulation Resistance:** 100 Megohms (min.) at 500VDC
- Dielectric Strength:** 1000V RMS (min.)
- Temperature Rating:** -4° to +180°F (-20° to +85°C)
- Electrical Life:** 25,000 cycles
- Mechanical Life:** 100,000 cycles
- Terminal Type:** .250" Tab Q.C.
- Mounting Hole:** .500 (12.7)

NTE Type No.	Circuitry	Action			Actuator				Diag No.
					Material	Color		Vltg	
						Neon	LED		
54-567	SPST	ON	NONE	OFF	PC	Red	-	AC	S31a
54-568	SPST	ON	NONE	OFF	PC	Green	-	AC	S31a
54-569	SPST	ON	NONE	OFF	PC	Amber	-	AC	S31a
54-570	SPST	ON	NONE	OFF	PC	Blue	-	AC	S31a
54-572	SPST	ON	NONE	OFF	PC	Red	-	AC	S31b
<b>NEW</b> 54-572-L	SPST	ON	NONE	OFF	PC	-	Red	DC	S31b
54-573	SPST	ON	NONE	OFF	PC	Amber	-	AC	S31b
54-574	SPST	ON	NONE	OFF	PC	Blue	-	AC	S31b
<b>NEW</b> 54-574-L	SPST	ON	NONE	OFF	PC	-	Blue	DC	S31b
54-575	SPST	ON	NONE	OFF	PC	Green	-	AC	S31b
<b>NEW</b> 54-575-L	SPST	ON	NONE	OFF	PC	-	Green	DC	S31b
<b>NEW</b> 54-705-R	SPST	ON	NONE	OFF	PC	-	Red	DC	S31c
<b>NEW</b> 54-705-A	SPST	ON	NONE	OFF	PC	-	Amber	DC	S31c
<b>NEW</b> 54-705-G	SPST	ON	NONE	OFF	PC	-	Green	DC	S31c
<b>NEW</b> 54-706-R	SPST	ON	NONE	OFF	PC	-	Red	DC	S31d
<b>NEW</b> 54-706-A	SPST	ON	NONE	OFF	Metal	-	Amber	DC	S31d
<b>NEW</b> 54-706-G	SPST	ON	NONE	OFF	Metal	-	Green	DC	S31d