


Pushbutton Canopy Switch




Features

- 2 Circuit, 4 Position Canopy Switch
- Sequence - Load 1 On, Load 2 On, Load 1 & 2 On, All Off

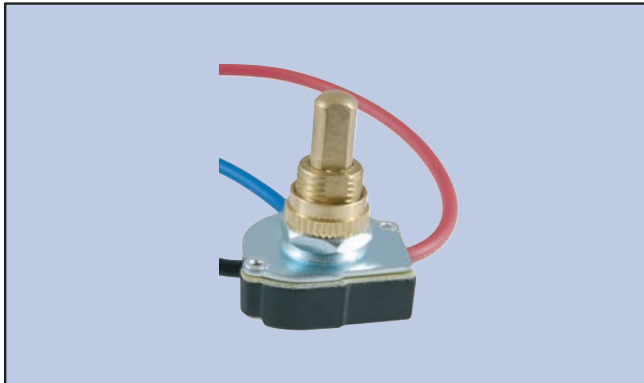

S122

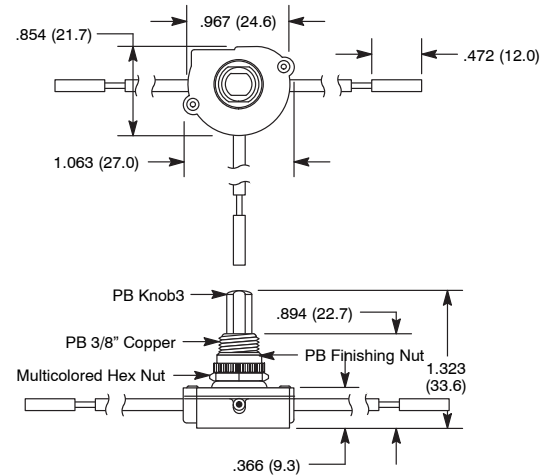

Specifications

- Current Rating:** 1A 125VT, 3A 250VAC, 6A 125VAC, 6A 125VL
- Insulation Resistance:** 100 Megohms (min.)
- Dielectric Strength:** 1500V RMS (min.)
- Temperature Rating:** +32° to +185°F (+0° to +85°C)
- Electrical Life:** 6,000 cycles (min.)
- Mechanical Life:** 6,000 cycles (min.)
- Terminal Type:** 18 AWG, 6" length
- Mounting Hole:** .393 (10.0)

NTE Type No.	Sequence				Actuator	Diag No.
	Load 1	Load 2	Load 1 & 2	All		
54-662	ON	ON	ON	OFF	3/8" Brass Plate	S122

NEW