


EUROSTYLE TERMINAL BLOCKS

25-E1800 Series PC Mount

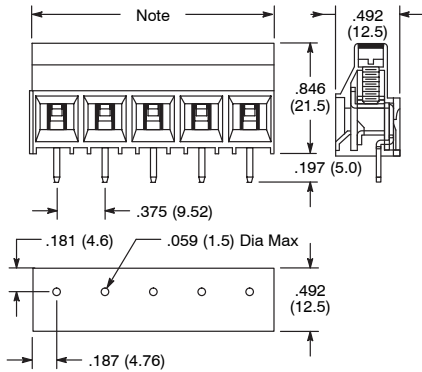

Note: $.375 (9.52) \times (P-1) + .375 (9.52)$

Pitch: 9.52mm


Specifications

Approval	c US
Rated Voltage	300V / 600V
Rated Current	30A / 5A
Wire Range	-
Solid Wire (AWG)	26 - 10
Stranded Wire (AWG/mm ²)	26 - 10
Rated Surge Voltage (UL/Max.)	2.2KV / 4KV
Torque (Lb-in)	4.4
Screw Type	M3
Wire Strip Length	.236 - .276" (6 - 7mm)

Ordering Information

Number of Poles	NTE Part Number
02	25-E1800-02
03	25-E1800-03

25-E200 Series PC Mount Wire Protector

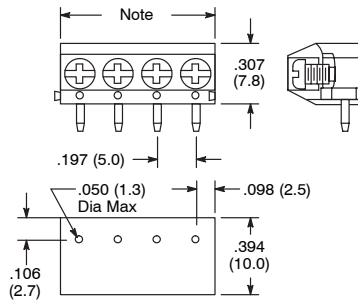

Note: $.197 (5.0) \times P$

Pitch: 5mm


Specifications

Approval	c US
Rated Voltage	300V
Rated Current	16A
Wire Range	-
Solid Wire (AWG)	24 - 14
Stranded Wire (AWG/mm ²)	24 - 14
Rated Surge Voltage (UL/Max.)	1.6KV / 4KV
Torque (Lb-in)	3.5
Screw Type	M2.5
Wire Strip Length	.197 - .236" (5 - 6mm)

Ordering Information

Number of Poles	NTE Part Number
02	25-E200-02
03	25-E200-03

25-E400 Series PC Mount Wire Protector

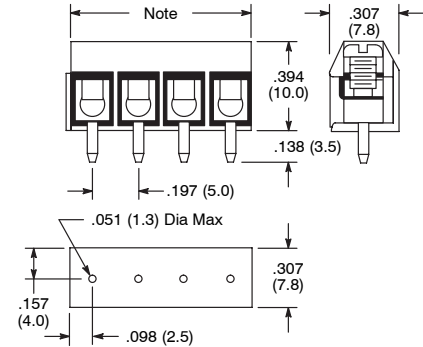

Note: $.197 (5.0) \times P$

Pitch: 5mm

Specifications

Approval	c US
Rated Voltage	300V
Rated Current	16A
Wire Range	-
Solid Wire (AWG)	24 - 14
Stranded Wire (AWG/mm ²)	24 - 14
Rated Surge Voltage (UL/Max.)	1.6KV / 4KV
Torque (Lb-in)	3.5
Screw Type	M2.5
Wire Strip Length	.197 - .236" (5 - 6mm)

Ordering Information

Number of Poles	NTE Part Number
02	25-E400-02
03	25-E400-03
04	25-E400-04
05	25-E400-05
06	25-E400-06
07	25-E400-07
08	25-E400-08
09	25-E400-09
10	25-E400-10