

5V AC-DC Switching Regulated Power Supply



Specifications

AC Input

Voltage Range: 90 – 264 VAC
 Input Frequency: 47 – 63 Hz
 Inrush Current: 30A Max




DC Output

Voltage Range: 4.5V – 5.6V
 Current Range: 0.1A – 3A

Reliability

Insulation Resistance: 50MΩ Min (Input to Output, DC 500V)
 MTBF: 50000 Hours

Plug Types

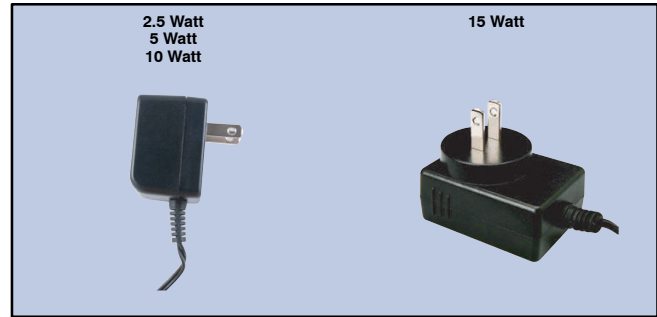

Ordering Information

NTE Type No.	DC Output		Plug Type
	Amps	Wattage	
57-5D-500-1	500mA	2.5	2.1mm x 5.5mm Jack
57-5D-500-2	500mA	2.5	2.5mm x 5.5mm Jack
57-5D-500-3	500mA	2.5	1.35mm ID x 3.5mm OD Plug
NEW 57-5D-500-4	500mA	2.5	2.1mm ID x 5.5mm OD Plug
NEW 57-5D-500-5	500mA	2.5	2.5mm ID x 5.5mm OD Plug
NEW 57-5D-1000-4	1A	5	2.1mm ID x 5.5mm OD Plug
NEW 57-5D-1000-5	1A	5	2.5mm ID x 5.5mm OD Plug
NEW 57-5D-2000-4	2A	10	2.1mm ID x 5.5mm OD Plug
NEW 57-5D-2000-5	2A	10	2.5mm ID x 5.5mm OD Plug
NEW 57-5D-3000-4	3A	15	2.1mm ID x 5.5mm OD Plug
NEW 57-5D-3000-5	3A	15	2.5mm ID x 5.5mm OD Plug

Need Power Jacks to go with your power supply? You can find them on Page 10.

6V AC-DC Switching Regulated Power Supply



Specifications

AC Input

Voltage Range: 90 – 264 VAC
 Input Frequency: 47 – 63 Hz
 Inrush Current: 30A Max



DC Output

Voltage Range: 5.5V – 6.8V
 Current Range: 0.1A – 0.5A

Reliability

Insulation Resistance: 50MΩ Min (Input to Output, DC 500V)
 MTBF: 50000 Hours

Plug Types



Ordering Information

NTE Type No.	DC Output		Plug Type
	Amps	Wattage	
57-6D-500-1	500mA	3	2.1mm x 5.5mm Jack
57-6D-500-2	500mA	3	2.5mm x 5.5mm Jack
57-6D-500-3	500mA	3	1.35mm ID x 3.5mm OD Plug
NEW 57-6D-500-4	500mA	3	2.1mm ID x 5.5mm OD Plug
NEW 57-6D-500-5	500mA	3	2.5mm ID x 5.5mm OD Plug

Need Power Jacks to go with your power supply? You can find them on Page 10.