



MAX Equivalent – Low Voltage Max Automotive, Fast Acting

Features

- Fast Acting
- RoHS Compliant

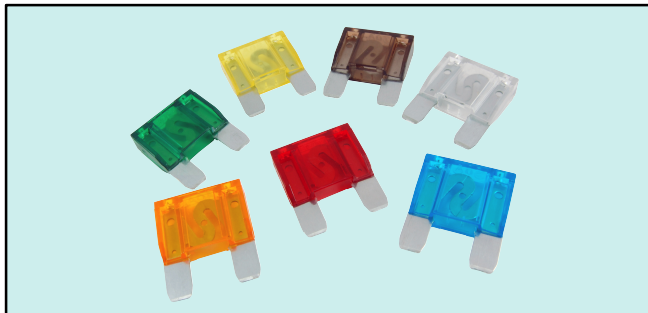

F-11

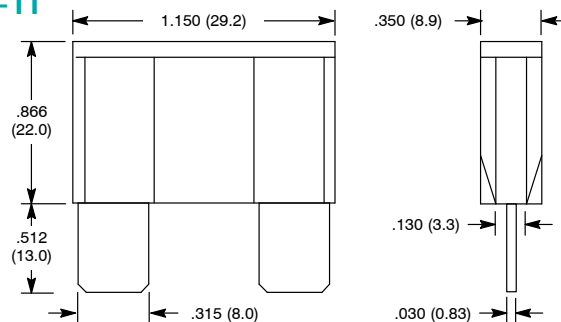

NTE Type No.	Rated Current	Color Code	Diag No.
74-XAF20A	20A	Yellow	F-11
74-XAF30A	30A	Green	F-11
74-XAF40A	40A	Orange	F-11
74-XAF50A	50A	Red	F-11
74-XAF60A	60A	Blue	F-11
74-XAF70A	70A	Tan	F-11
74-XAF80A	80A	Natural	F-11

Specifications

Rated Voltage: 42V

Time Current Characteristics:

% of Ampere Rating	Opening Time
110%	100 hours min.
135%	3600 seconds max.
200%	120 seconds max.

Accessories:

Description	NTE Type No.
Fuse Holder, up to 60A	74-FHX


Low Profile Mini Fuse

Features

- Miniature Blade Type



F-14

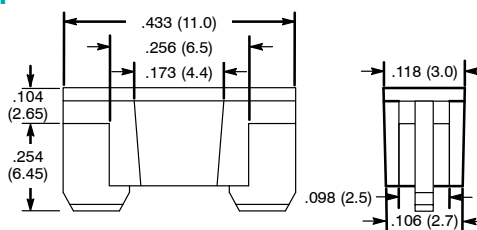

Specifications

Rated Voltage: 32V

Time Current Characteristics:

% of Ampere Rating	Opening Time
110%	100 hours min.
135%	0.75 – 1800 seconds
200%	0.15 – 5 seconds
350%	0.08 – 0.25 seconds max.

Accessories:

Description	NTE Type No.
Fuse Circuit Tap for Low Profile Mini Blade Fuses	74-AFT3

	NTE Type No.	Rated Current	Color Code	Diag No.
NEW	74-LPM-2A	2A	Gray	F-14
NEW	74-LPM-3A	3A	Violet	F-14
NEW	74-LPM-4A	4A	Pink	F-14
NEW	74-LPM-5A	5A	Tan	F-14
NEW	74-LPM-7.5A	7.5A	Brown	F-14
NEW	74-LPM-10A	10A	Red	F-14
NEW	74-LPM-15A	15A	Blue	F-14
NEW	74-LPM-20A	20A	Yellow	F-14
NEW	74-LPM-25A	25A	Clear	F-14