



## 800 WATT POWER INVERTER MODEL: S LX-800- EXP

PLUG YOUR INVERTER INTO THE LIGHTER SOCKET OR CLAMP ON TO YOUR VEHICLE BATTERY TO CONNECT.

THEN PLUG YOUR DEVICE INTO THE INVERTER FOR POWER.




## HOUSEHOLD POWER FROM A 12V BATTERY

Samlex power inverters connect to the battery in your car and let you Plug In Your Stuff wherever you go! Light up your campsite at night, keep your camera batteries charged, take your office outdoors, fire up your TV at the tail-gate and power your camping fridge. After all, who likes warm beer?

### DESIGN FEATURES

- Light weight, compact, highly portable
- Easy to install and operate
- 2.1 Amp USB Port (compatible with all new release smart phones)
- Load controlled cooling fan
- Cool surface technology
- Soft start technology
- Low battery input alarm
- Universal protection circuit – thermal, battery, overload, short circuit & earth fault
- Safety certified to UL standards
- 2 YEAR WARRANTY

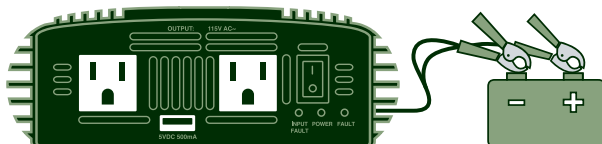

### SPECIFICATIONS

INPUT	BATTERY SYSTEM VOLTAGE	12 VDC
	NOMINAL INPUT VOLTAGE	12.5 VDC
	INPUT VOLTAGE RANGE	> 10.8 VDC to < 15.4 VDC
	INPUT CURRENT AT CONTINUOUS POWER	72A to 75A
	INPUT CURRENT AT NO LOAD	0.25A to 0.35A
OUTPUT	OUTPUT VOLTAGE WAVE FORM	Modified Sine Wave
	OUTPUT VOLTAGE (FREQUENCY)	115VAC + 10% / -2%; 60 Hz ± 5%
	OUTPUT POWER, CONTINUOUS (RESISTIVE LOAD)	800W
	OUTPUT POWER, SURGE (<1 SEC., RESISTIVE LOAD)	1600W
	PEAK EFFICIENCY (AT 50% OF CONTINUOUS POWER)	90%
PROTECTIONS	USB CHARGING PORT	USB 3.0, Connector Type "A": 5 VDC, 2.1A
	LOW INPUT VOLTAGE ALARM	10.8 VDC ± 0.3 VDC
	LOW INPUT VOLTAGE SHUTDOWN	10.5 VDC ± 0.3 VDC
	HIGH INPUT VOLTAGE SHUTDOWN	15.4 VDC ± 0.2 VDC
	OVERLOAD AND GROUND FAULT SHUT DOWN	Yes. Latches in shutdown condition. Manual reset: Switch OFF the ON/OFF switch, wait 3 mins and Switch ON again.
OUTLETS	OVER TEMPERATURE SHUTDOWN	Yes. Auto reset on cooling down.
	COOLING FAN	Load controlled: Switches ON at 35W to 45W
	INPUT FUSE: 32V, AUTOMOTIVE TYPE ATC (INSIDE THE UNIT, NOT USER ACCESSIBLE)	105A (3 x 35A in parallel)
	DC INPUT	M4 Thumb Screw
	AC OUTPUT	Two NEMA5-15 R Outlets
GENERAL	OPERATING TEMPERATURE RANGE	0°C to 25°C / 32°F to 77°F at 100% loading; 26°C to 35°C / 78.8°F to 95°F at 80% loading
	OPERATING HUMIDITY	< 80% Non-condensing
	NEUTRAL TO CHASSIS BONDING	No. Neutral of the NEMA5-15 R AC Outlet is isolated from the chassis
	DIMENSIONS (W x D x H)	180 x 218 x 59 mm 7.0 x 8.6 x 2.4 in
SAFETY	WEIGHT	1.32 kg / 2.91 lb
	DC INPUT CABLES INCLUDED	AWG#8 Cable with battery clamps
	Safety Compliance	Conforms to UL 5 TD 458

NOTE: Specifications are subject to change without notice

