


CLOSED END SOLDER SPLICE SEALED

Specifications

- Maximum Electrical Rating:
- Maximum Temperature: +125°C
- Minimum Shrink Temperature: +150°C
- Temperature that Solder Starts to Melt: +138°C
- Temperature that Solder Fully Melts: +160°C
- Insulated Material: PVDF

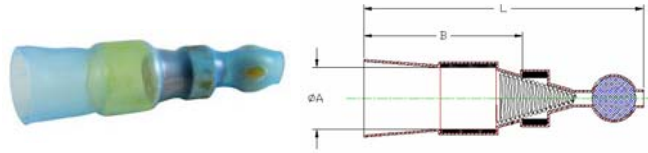

Ordering Information:

	Wire Range AWG / mm ²	NTE Part Number	Dimensions inch(mm)			Insulation Color
			∅ A	B	L	
NEW	22 AWG 0.7 – 2.4mm ²	76-CESS-1	.142 (3.6)	1.024 (26.0)	1.508 (38.3)	Green
NEW	20 AWG 2.0 – 4.0mm ²	76-CESS-2	.197 (5.0)	.925 (23.5)	1.484 (37.7)	Red
NEW	18 AWG 3.5 – 8.0mm ²	79-CESS-3	.295 (7.5)	1.043 (26.5)	1.791 (45.5)	Blue
NEW	16 AWG 7.5 – 12mm ²	79-CESS-4	.370 (9.4)	1.004 (25.5)	1.772 (45.0)	Yellow