


EUROSTYLE TERMINAL BLOCKS

25-E1500 Series Wire Protector

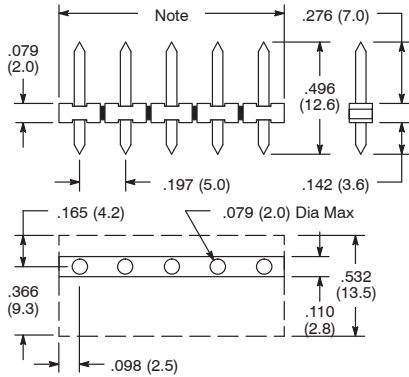

Note: .197 (5.0) x P

Pitch: 5mm


Specifications

| | |
|--------------------------------------|-------------|
| Approval | |
| Rated Voltage | 300V |
| Rated Current | 7A |
| Wire Range | - |
| Solid Wire (AWG) | - |
| Stranded Wire (AWG/mm ²) | - |
| Rated Surge Voltage (UL/Max.) | 1.6KV / 4KV |
| Torque (Lb-in) | - |
| Screw Type | - |
| Wire Strip Length | - |

Ordering Information

| Number of Poles | NTE Part Number |
|-----------------|-----------------|
| 02 | 25-E1500-02 |
| 03 | 25-E1500-03 |
| 04 | 25-E1500-04 |
| 05 | 25-E1500-05 |
| 06 | 25-E1500-06 |
| 07 | 25-E1500-07 |
| 08 | 25-E1500-08 |
| 09 | 25-E1500-09 |
| 10 | 25-E1500-10 |
| 11 | 25-E1500-11 |
| 12 | 25-E1500-12 |

25-E1600 Series Wire Protector

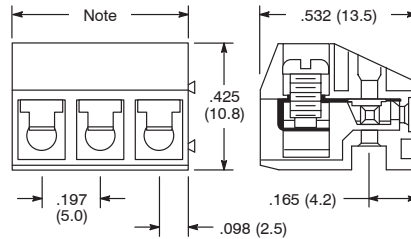

Note: .197 (5.0) x P

Pitch: 5mm


Specifications

| | |
|--------------------------------------|------------------------|
| Approval | |
| Rated Voltage | 300V |
| Rated Current | 7A |
| Wire Range | - |
| Solid Wire (AWG) | 22 - 14 |
| Stranded Wire (AWG/mm ²) | 22 - 14 |
| Rated Surge Voltage (UL/Max.) | 1.6KV / 4KV |
| Torque (Lb-in) | 2.7 |
| Screw Type | M2.5 |
| Wire Strip Length | .197 - .236" (5 - 6mm) |

Ordering Information

| Number of Poles | NTE Part Number |
|-----------------|-----------------|
| 02 | 25-E1600-02 |
| 03 | 25-E1600-03 |
| 04 | 25-E1600-04 |
| 05 | 25-E1600-05 |
| 06 | 25-E1600-06 |
| 07 | 25-E1600-07 |
| 08 | 25-E1600-08 |
| 09 | 25-E1600-09 |
| 10 | 25-E1600-10 |
| 11 | 25-E1600-11 |
| 12 | 25-E1600-12 |

25-E900 Series PCB Socket for Pluggable Types

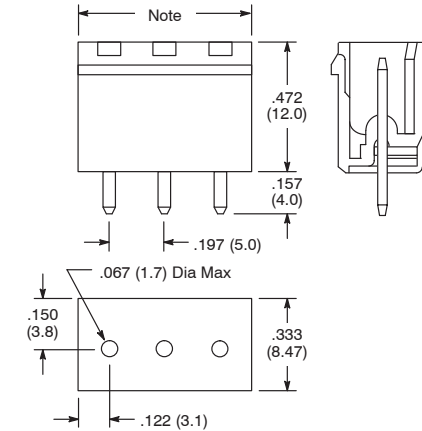

Note: .197 (5.0) x (P-1) + .244 (6.2)

Pitch: 5mm

Specifications

| | |
|--------------------------------------|-------------|
| Approval | |
| Rated Voltage | 300V |
| Rated Current | 15A |
| Wire Range | - |
| Solid Wire (AWG) | - |
| Stranded Wire (AWG/mm ²) | - |
| Rated Surge Voltage (UL/Max.) | 1.6KV / 4KV |
| Torque (Lb-in) | - |
| Screw Type | - |
| Wire Strip Length | - |

Ordering Information

| Number of Poles | NTE Part Number |
|-----------------|-----------------|
| 02 | 25-E900-02 |
| 03 | 25-E900-03 |
| 04 | 25-E900-04 |
| 05 | 25-E900-05 |
| 06 | 25-E900-06 |
| 07 | 25-E900-07 |
| 08 | 25-E900-08 |
| 09 | 25-E900-09 |
| 10 | 25-E900-10 |
| 12 | 25-E900-12 |